

**Alliance for the Chesapeake Bay Forest Planting Contractor Bid**  
Spring 2022: Pennsylvania

The Alliance for the Chesapeake Bay is seeking bids from forest planting contractors to plant 40.31 acres of forest in south-central Pennsylvania. Services sought entail:

- Planting 10,744 bare-root seedlings during spring 2022 planting season
- Installation of perforated 5' deer shelters on all stems

**Scope of Work**

The contractor shall be responsible for providing all equipment, material and supplies to complete the tree planting projects and maintenance according to the planting specifications & contractor's responsibilities listed below. The contractor shall scalp away the turf at each tree seedling planting location, hand plant (dibble bar or hoedad only) approximately 10,744 bare-root tree seedlings, install approximately 10,744 five-foot (5') perforated tree shelters, with 1"x1" white oak stakes, reversible ties, and netting on approximately 40.31 acres between April 1, 2022 and June 1, 2022. Trees will be planted on 10 properties in Adams, Bedford, Lycoming, Union, and Lancaster Counties Pennsylvania; site locations are indicated on the project spreadsheet.

**Minimum Qualifications of a Bidder**

1. The Bidder will be a reputable contractor with a minimum of five (5) years of experience in planting bare-root tree seedlings, installing tree shelters with stakes & bird nets and possess current insurance and pesticide applicators license.
2. The Bidder may be asked to provide three references that can verify qualifications above and copies of current insurance and license. A Bidder that does not meet the minimum qualifications will be rejected.


**Planting Specifications and Contractor's Responsibilities**

1. The contractor will mow each site within one month of the planting, if deemed necessary by the Alliance for the Chesapeake Bay (Alliance).
2. The contractor will provide all labor, planting stock, materials, and equipment to fulfill all aspects of the scope of work as outlined above. Species and quantities of tree seedlings to be planted are included in the planting plans provided by the Alliance. The contractor agrees to follow the planting specifications provided in the tree planting plan for each property unless otherwise directed and approved by Alliance personnel.
3. The contractor shall scalp away turf at 5" x 5" at the spot of each tree seedling.
4. All tree seedlings will be hand planted (dibble bar or hoedad only) at the spacing grid specified in the tree planting plan for the site, as prepared by the Alliance, using accepted industry standards, methods, and equipment.
5. All seedlings when transported and/or stored on a planting site will always be protected with reflective seedling tarps or other appropriate means to prevent overheating and drying out of the seedlings. There will be no root pruning of the seedlings unless approved by the Alliance.

6. The contractor will dip all tree seedling roots in a water retention polymer such as Terra-Sorb, Soil Moist, or similar product, with approval of the Alliance, prior to planting. The contractor will provide the Terra- Sorb, Soil Moist, or similar product.
7. The contractor agrees to begin planting at a date mutually acceptable to both parties and to complete the planting projects by no later than June 1, 2022 (absolutely no exceptions). The planting shall not be done when excess water is standing on the site, or when the ground is frozen or extremely dry.
8. The contractor will plant seedlings at the depth the seedlings were grown, which is to be the root collar. Planting holes will be properly closed to ensure that all air pockets are removed.
9. The contractor will plant each tree seedling in such a manner that "J" and "U" roots will not occur, and each tree seedling will be firmed with mineral soil packed in and around the roots so the seedling cannot be pulled out of the ground by light tugs.
10. The contractor will provide 10,744 seedlings (according to the requested species selection and quantities) 10,744 five-foot (5') perforated tree shelters and 1" x 1" x 5' white oak stakes, reversible fastening ties, and bird mesh nettings.
11. The contractor will install the tree shelters around each designated tree in a manner that prevents each seedling from being constricted by the shelter fastening ties. The straight edge of the tree shelters must be installed 2-5 centimeters into the soil. The flared edge is the top end of the tree shelter, on which the bird netting is placed. All tree shelter fastening ties will be pulled tightly and firmly against each tree shelter stake. Bird nets will be installed on each tree shelter in a manner to prevent bird entry into the shelter and far enough to keep the nets from blowing off in the wind.
12. The contractor will install each tree shelter stake in a straight and upright manner and to a minimum depth in the soil of ten to twelve inches (10"-12"). The top of each installed stake will be no greater than three inches (3") above the top fastening tie of the shelter when it is tightened. All stakes will be placed on the upstream side of the tree shelters so that flood waters contact the stakes prior to the shelters.
13. The contractor will properly install all tree shelters with stakes and bird netting on each tree seedling on the same day that each seedling is planted.
14. The contractor will repair, replace, or reimburse for damage to any property beyond ordinary wear and tear in the performance of the contract.
15. All work performed will be certified by the Alliance as to acceptability and adherence to planting plans and standards before the Alliance will compensate the contractor for any work performed.
16. The final number of planting sites, seedlings, tree shelters, stakes and nets may change prior to the commencement of this contract. The Alliance will notify the contractor of all changes as they occur. Any additions or subtractions to the list of planting sites will be adjusted according to per unit prices in the bid provided.

### Site Details

<b>Name</b>	<b>Acres</b>	<b># Trees</b>	<b>County</b>	<b>Address</b>	<b>Prep Mow</b>
CF	5.83	1,600	Adams	Fairfield, PA	no
PN	2.6	715	Bedford	Bedford, PA	no
JH	4.4	1,210	Lycoming	Linden, PA	no
LT	3.1	852	Union	Mifflinburg, PA	no
AE	2.25	620	Lancaster	Christiana, PA	no
KM	3.4	987	Lancaster	Mount Joy, PA	no
EE	2.43	668	Lancaster	Paradise, PA	no
LG	1.8	495	Lancaster	Quarryville, PA	no
BS	5.2	1,040	Lancaster	Quarryville, PA	no
ES	9.3	2,557	Lancaster	Quarryville, PA	no
<b>TOTAL</b>	<b>40.31</b>	<b>10,744</b>			

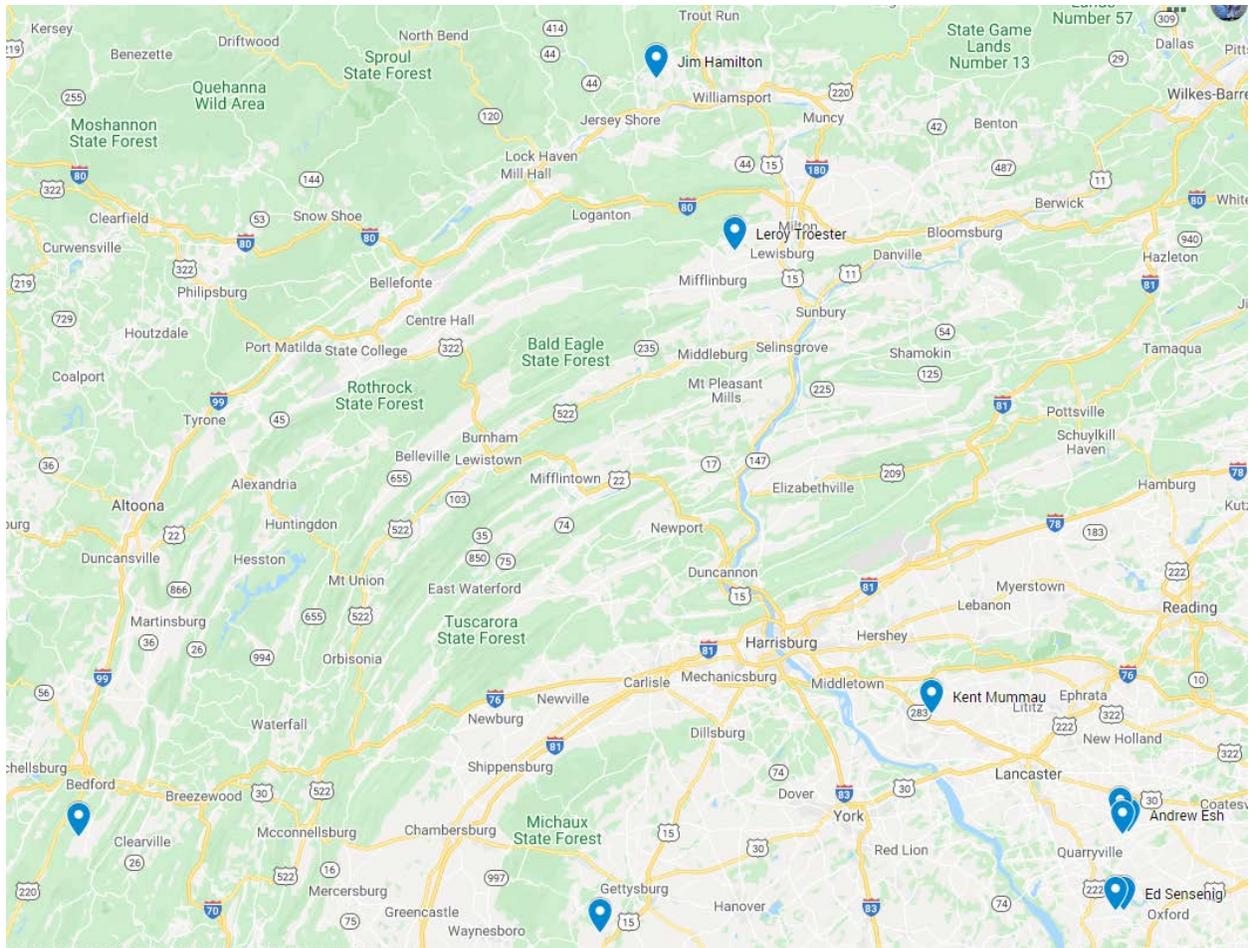

**Site Locations Map**

**Site Maps withheld for landowner privacy but available upon request**

**RETURN BID SHEET** (below) Electronically to: [rdavis@allianceforthebay.org](mailto:rdavis@allianceforthebay.org). All questions about this bid package should be made directly to Ryan Davis through email (see above) or by phone at 757-377-3200.

**Bid Sheet - Alliance for the Chesapeake Bay Forest Planting Contractor Bid**

Return Bid Sheet By Friday, March 4, 2022.

<b>Task</b>	<b>Price per unit/acre</b>	<b>Total Bid Price</b>
Hand-plant 10,744 bareroot tree seedlings in accordance to the planting plans specifications		
Provide all materials for and install 10,744 perforated tree shelters (5') with white oak stakes (5'), reversible ties, and bird netting		
Provide 10,744 seedlings in accordance with the provided planting plans		
<b>TOTAL PLANTING BID PRICE</b>		

Company Name:

Address:

Phone:

Email:

Signature:

Date:

Name Printed: